



## Comparison of SAR Wind Speed Retrieval Algorithms for Evaluating Offshore Wind Energy Resources

Kozai, K.; Ohsawa, T.; Takeyama, Y.; Shimada, S.; Niwa, R.; Hasager, Charlotte Bay; Badger, Merete

*Published in:*  
Proceedings (CD-ROM)

*Publication date:*  
2010

*Document Version*  
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

*Citation (APA):*  
Kozai, K., Ohsawa, T., Takeyama, Y., Shimada, S., Niwa, R., Hasager, C. B., & Badger, M. (2010). Comparison of SAR Wind Speed Retrieval Algorithms for Evaluating Offshore Wind Energy Resources. In *Proceedings (CD-ROM)* (pp. 007). Techno-Ocean Network.

---

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

# Comparison of SAR Wind Speed Retrieval Algorithms for Evaluating Offshore Wind Energy Resources

**K. Kozai, T.Ohsawa**

Kobe University Graduate School of Maritime Sciences

**Y. Takeyama**

National Institute of Advanced Industrial Science and Technology

**S. Shimada, R. Niwa**

Kobe University Graduate School of Maritime Sciences

**C.B. Hasager, M. Badger**

Risoe National Laboratory for Sustainable Energy, Technical University of Denmark

*Abstract* - Envisat/ASAR-derived offshore wind speeds and energy densities based on 4 different SAR wind speed retrieval algorithms (CMOD4, CMOD-IFR2, CMOD5, CMOD5.N) are compared with observed wind speeds and energy densities for evaluating offshore wind energy resources. CMOD4 ignores effects of atmospheric stability, while CMOD5.N assumes a neutral condition. By utilizing Monin-Obukov similarity theory in the inverse LKB code, equivalent neutral wind speeds derived from CMOD5.N are converted to stability dependent wind speeds (CMOD5N\_SDW). Results of comparison in terms of energy density indicate the CMOD5N\_SDW shows the lowest errors than the other algorithms.

## I. INTRODUCTION

Offshore wind is expected as a renewable energy resource and one of countermeasures to solve global warming issues. In order to evaluate offshore wind as energy resources Kozai et al.[1] demonstrated mapping of Weibull energy density based on 49 scenes of Envisat/ASAR-derived wind speeds. Results of mapping indicated the existence of maximum Weibull energy density located from 33.50 to 33.55 degrees North along the meridional transect. These maximums are corresponding to the northern edge of the Kuroshio where sea surface temperature is much higher than air temperature during winter period. In these extremely-unstable conditions a high degree of atmospheric mixing compared to neutral conditions would lead to an overestimation of the wind speed at a given height according to the logarithmic profile law[2]. As far as the atmospheric stability effect on wind speed is concerned, wind speed retrieval algorithm like CMOD4 ignores the stability effect[3], while CMOD5.N assumes a neutral condition[6].

The purpose of the study is to compare accuracies of four SAR wind speed retrieval algorithms against observed wind speed for evaluating offshore wind energy resources considering atmospheric stability.

## II. DATA AND METHODS

27 ASAR scenes covering the offshore wind observation station at Shirahama are acquired from European Space Agency from January, 2005 to March, 2008. Specifications of Envisat/ASAR and its scene coverage are described in TABLE I and Fig. 1 respectively. ASAR scenes are processed to derive Normalized Radar Cross Section (NRCS) called sigma nought. Then each image is resampled at 1500m spatial resolution after taking mean of 1500mx1500m for each pixel. These NRCSs, incidence angles and relative wind directions are used to estimate wind speeds using CMOD4[3], CMOD-IFR2 [4], CMOD5 [5] and CMOD5.N [6] algorithms respectively. Relative wind directions are defined as the ASAR viewing direction relative to the observed wind direction at the time of ASAR overpass. In this study WRF-simulated wind direction field is used as a substitute of the observed wind direction. WRF is the next generation mesoscale model of MM5 developed by University Corporation for Atmospheric Research (UCAR) and National Center for Environmental Prediction (NCEP). The WRF simulation is performed with the 2-way nesting option for the two domains gradually focusing on Shirahama. The simulated 1.5km-gridded wind direction field is used for the input into the wind speed retrieval algorithms above.

At Shirahama there is a marine tower of Shirahama Oceanography Observatory, Disaster Prevention Research Institute, Kyoto University. This tower has a height of 23 m and is located offshore at 135.333°E, 33.709°N, 2km away from the nearest coastline (Fig.1). At the Shirahama station a propeller anemometer is equipped at the height of 23 m above mean sea level and measures wind speed and direction. Since ASAR-derived wind speeds using four wind speed retrieval algorithms are defined as those at the height of 10m, all measured wind speeds are converted to wind speeds at the height of 10m using Monin-Obukhov similarity theory. And equivalent neutral wind speeds derived from CMOD5.N are converted to stability dependent wind speeds (CMOD5N\_SDW) by using an

inverse LKB code which is based on the LKB code developed by Liu et al.[7]. Stability dependent wind speeds have been used for evaluating effects of air-sea stability on QuikSCAT-derived wind speeds [8].

In order to evaluate offshore wind as energy resources energy density needs to be calculated. Energy density( $E(\text{W/m}^2)$ ) is proportional to the wind speed cubed and defined as follows.

$$E=0.5 \times \rho \times U^3 \quad (1)$$

where  $\rho$  ( $\text{kg/m}^3$ ) is the air density and  $U$  ( $\text{m/s}$ ) is the wind speed.

TABLE I  
SPECIFICATIONS OF ENVISAT/ASAR

Mode/Product	Image mode(IM)/Precision
Beam/Swath	IS2/107.7km
Incidence angle	18.7~26.2 degree
Polarization/Pixel spacing	VV/12.5m

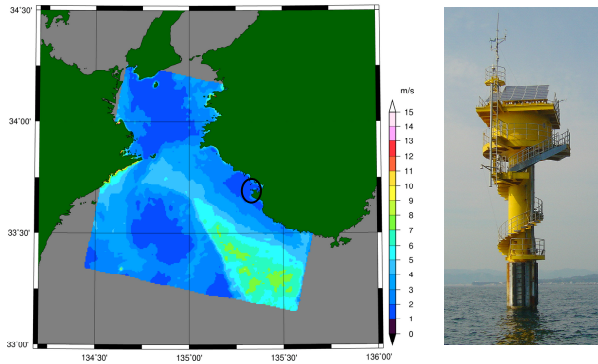


Fig. 1. ASAR-derived wind speed (Aug.20, 2003, 01h 09m (UT)). Circle indicates the location of Shirahama offshore wind observation station (right).

### III. RESULTS AND DISCUSSION

Fig. 1 shows an example of ASAR-derived wind speed based on CMOD4. And Fig. 2 and Table II indicate the results of comparison of stability dependent and estimated wind speeds and energy density based on four wind speed retrieval algorithms. In Table II CMOD5N\_SDW shows the smallest bias in terms of wind speed and energy density, while CMOD5 and CMOD5N\_SDW indicate the lowest RMS errors in terms of wind speed. These results suggest that SAR wind speed retrieval algorithm considering atmospheric stability (CMOD5N\_SDW) show lower errors and biases than those without considering atmospheric stability. This indicates that it is inevitable to consider atmospheric stability effect on wind speed retrieval using synthetic aperture radar. Furthermore it is found that mean wind speed and energy density considering atmospheric stability are higher than those without considering atmospheric stability at Shirahama. These differences of wind speed among wind speed retrieval algorithms are getting more emphasized offshore south of Shirahama than those along the coast. Fig.3 illustrates average wind speed distribution based on CMOD4 (a), CMOD-IFR2 (b),

CMOD5 (c) and CMOD5N\_SDW (d) algorithms respectively. It is found that the strong wind passage is seen from 20 to 30km off the coast. Differences of average wind speed among four algorithms in the passage are more than 1m/s.

TABLE II  
BIAS, RMS ERRORS AND MEAN OF WIND SPEED AND ENERGY DENSITY BASED ON FOUR WIND SPEED RETRIEVAL ALGORITHMS AT SHIRAHAMA

	CMOD4	CMOD-IFR2	CMOD5	CMOD5N_SDW
Wind speed (m/s)				
Bias	-0.85	-0.65	-0.37	-0.28
RMSE	1.95	1.83	1.65	1.66
Mean	4.97	5.16	5.44	5.54
Energy density( $\text{W/m}^2$ )				
Bias	-104.1	-78.6	-59.9	-55.3
RMSE	196.7	175.6	155.9	154.7
Mean	101.4	126.9	145.6	150.2

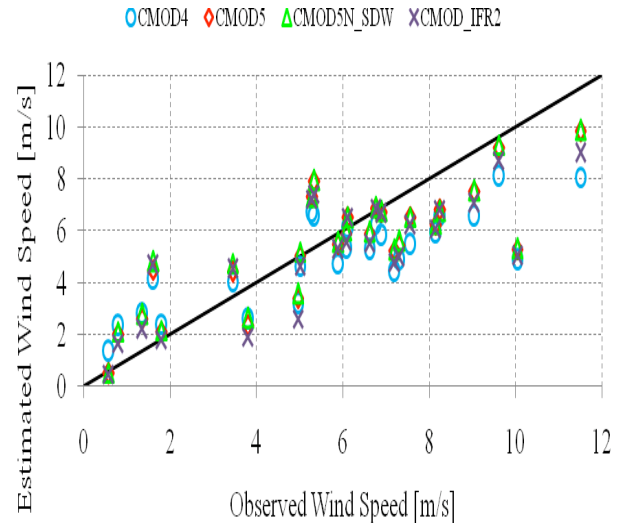
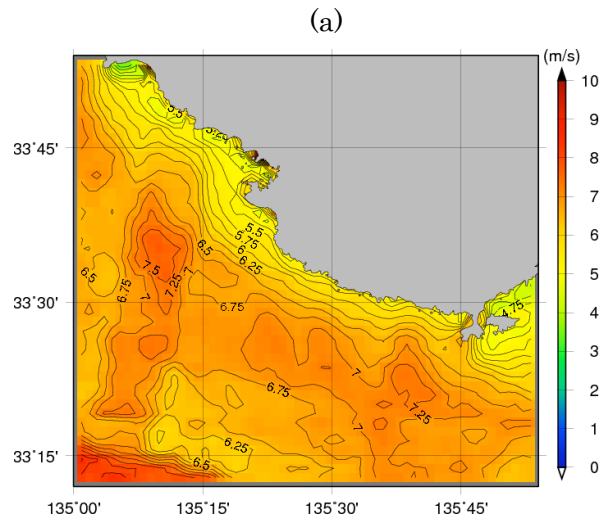


Fig. 2. Comparison of observed and estimated wind speed based on four wind speed retrieval algorithms.



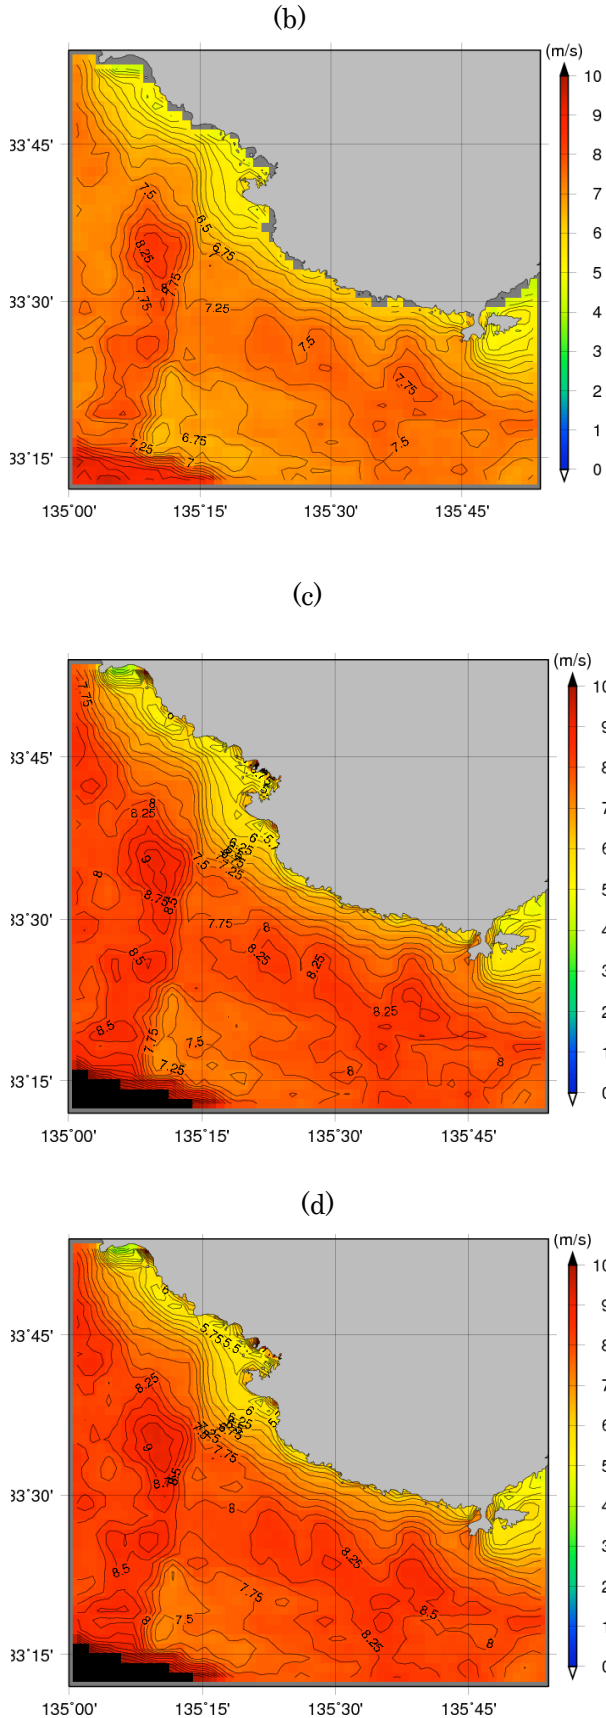


Fig. 3. Average wind speed distribution based on CMOD4(a), CMOD-IFR2(b), CMOD5(c) and CMOD5N\_SDW(d) algorithms respectively.

#### IV. CONCLUSION

Based on the results above, conclusions are summarized as follows.

- (1) SAR wind speed algorithms considering atmospheric stability (CMOD5N\_SDW) show lower errors and biases of wind speed and energy density than the other algorithms.
- (2) Mean wind speed and energy density of CMOD5N\_SDW considering atmospheric stability is higher than those of other algorithms at Shirahama.
- (3) Conclusions above indicate that it is inevitable to consider atmospheric stability effect on wind speed retrieval using synthetic aperture radar.

#### ACKNOWLEDGEMENTS

Envisat/ASAR scenes were acquired from the European Space Agency under the cooperative research project “Offshore wind resource assessments using SAR and MM5 over Japanese coastal waters”, C1P4068. The results of the study are obtained by cooperative research with the Disaster Prevention Research Institute, Kyoto University. This study is supported by a Grant-in-Aid for Scientific Research (B)(2) 19360406, (B) 22360379 and a Grant-in-Aid for Young Scientists (A) 19686052 from the Ministry of Education, Science, Sport and Culture, Japan. The authors would like to acknowledge Mr.Hashizumi, a graduate of Kobe University Faculty of Maritime Sciences for his contribution to this study.

#### REFERENCES

- [1] K. Kozai, T. Ohsawa, S. Shimada, Y. Takeyama, C. Hasager, M. Badger, “Comparison of Envisat/ASAR-estimated offshore wind resource maps around Shirahama with those from mesoscale models MM5 and WRF,” Proceedings of the European Offshore Wind Conference, PO.131, 2009.
- [2] M.B. Christiansen, W. Koch, J. Horstmann, C.B. Hasager, M. Nielsen, “Wind resource assessment from C-Band SAR,” Remote Sensing of Environment, vol.105, pp.68-81, 2006.
- [3] A. Stoffelen, D. Anderson, “Scatterometer data interpretation: Estimation and validation of the transfer function CMOD4,” J. Geophys. Res., vol.102, no.C3, pp. 5767-5780, 1997.
- [4] Y. Quilfen, B. Chapron, T. Elfouhaily, K. Katsaros and J. Tournadre, “Observation of tropical cyclones by high-resolution scatterometry,” J. Geophys. Res., vol. 103, no.C4, pp. 7767-7786, 1998.
- [5] H. Hersbach, A. Stoffelen and S. de Haan, “An improved C-band scatterometer ocean geophysical model function: CMOD5,” J. Geophys. Res., vol.112, no.C03006, 2007.
- [6] H. Hersbach, “CMOD5.N: A C-band geophysical model function for equivalent neutral wind,” ECMWF Technical Memorandum, No.554, 20p., 2008.
- [7] W.T. Liu and W. Tang, “Equivalent Neutral Wind,” JPL Publication 96-17, 8p., 1996.
- [8] A.B. Kara, A.J. Wallcraft, P.J. Martin, R.L. Pauley, “Optimizing surface winds using QuikSCAT measurements in the Mediterranean Sea during 2000-2006,” Journal of Marine Systems, vol.78, pp.5119-5131, 2009.